

# Ullswater 70mm Composite Stable Door (FP92)



Maximum sizes include vent head, standard threshold and cill

Minimum sizes include no vent head, no cill and low threshold

Standard Furniture	
Min Width	Max Width
788mm	1088mm
Min Height	Max Height
1764mm	2288mm


## 1 DOOR COLOURS

Same colour on inside and outside or white inside




## 2 FRAME COLOUR OPTIONS ONE COLOUR

Same colour on inside and outside



## 3 GLAZING OPTIONS

Triple Glazed – 6.8mm Laminated

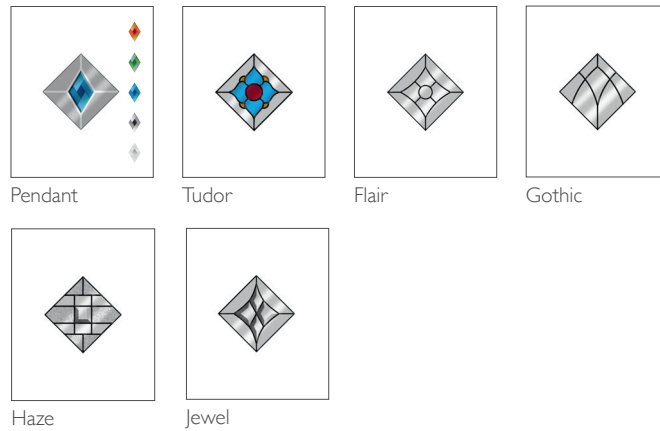


## 4 FURNITURE HARDWARE OPTIONS AS STANDARD

The door comes with the standard door furniture pack which has various options (see below).



### LETTERBOX



# Ullswater 70mm Composite Stable Door (FP92)

## TECHNICAL FEATURES

<b>Construction</b>	High density polyurethane thermally insulated core.
<b>Material</b>	GRP
<b>Finish</b>	GRP woodgrain texture moulded skin – Yes Smooth not available
<b>Rebate</b>	Double rebate weatherproof seals
<b>Frame</b>	70mm deep uPVC bevelled frame
<b>Opening</b>	Door opens in of the home only
<b>Locking system</b>	Multipoint locking mechanism
<b>Lock rating</b>	I* Euro Cylinder
<b>Cylinder Guard</b>	No
<b>Test standard</b>	Latest PAS 24:2016 security and weatherproof standards

## GLAZING OPTION

<b>Double</b>	No
<b>Triple</b>	Yes
<b>Side panels and Fanlights</b>	Matching glazing options available
<b>U values</b>	N/A
<b>Door Energy rating</b>	N/A
<b>Trickle ventilation</b>	N/A
<b>Secured by Design</b>	No

## ADDITIONAL ACCESSORIES AVAILABLE AS OPTIONS

<b>Fishing guard</b>	Yes
<b>Internal colour</b>	White
<b>External colour</b>	Chrome, Gold, Black
<b>Door chain</b>	Chrome Gold
<b>Hinge colours</b>	Chrome, Gold, Brown, White and Black
<b>SmartLock Available</b>	No
<b>Cat Flap</b>	No
<b>THRESHOLD</b> (property dependent ask surveyor for details)	
<b>Full frame</b>	Yes
<b>Low frame</b>	Yes
<b>Aluminium</b>	Yes
<b>Letterbox positioning</b>	Top of the lower half of the door
<b>Number of Keys</b>	3

## GUARANTEE

10 years – whole door including glazing, colour finish, hinges, locking mechanism and installation