






# LivinRoof Extensions and Roof Only

## Technical Specification

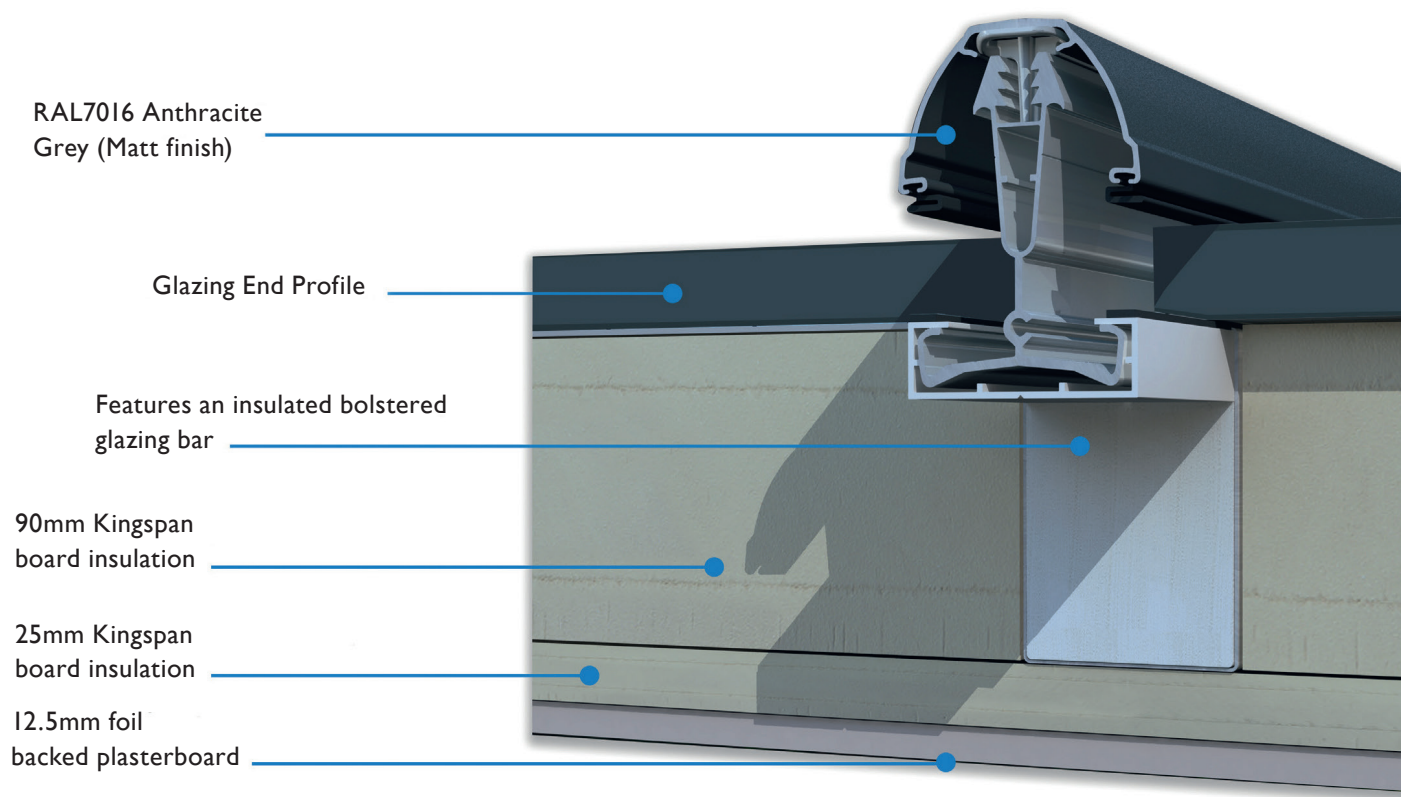

### The Benefits

- Warm roof system with no cold bridging
- Unrivalled thermal performance
- Thermally Broken rafters
- U value as low as 0.16
- Suitable for roof pitches as low as 5° (Cheltenham Design)
- Highly configurable - shaped glass panels can be fitted where natural light is needed.
- Vaulted ceiling and plaster finish
- Insulated internal pelmet 300mm projection as standard, option of up to a 1200mm projection, ideal for downlighters and speakers with all cables hidden
- Contemporary styling in Anthracite Grey RAL7016 as standard giving the appearance of a rolled lead roof
- Black Gutter as standard, with grey or white Cornice available as optional extra

- Weighs only 31kg/m<sup>2</sup> lighter than any other solid roof
- NASA satellite data used to precision engineer every roof for wind and snow loads
- Wind tested to withstand hurricane winds up to 130mph
- Roof structure is fire tested and rated to British and European Standards
  - Fire rated as B-roof according to EN 13501-5: 2016
  - Fire rated as AA according to BS476-3:2004

### Guarantees

- All Everest Conservatories are covered by a 10 year guarantee.
- Everest uPVC wall frame sealed units are covered by a 20 year guarantee against fog and condensation between the panes of the sealed unit. (excludes roof glazing)
- Everest wall frames covered by a 20 year guarantee against discolouration of the white uPVC